



ENGINEERS PLANNERS
LANDSCAPE ARCHITECTS SURVEYORS
VIKA MARYLAND, LLC
20251 CENTURY BOULEVARD SUITE 400
GERMANTOWN, MARYLAND 20874
PHONE: (301) 916-4100
FAX: (301) 916-2262
GERMANTOWN, MD MCLEAN, VA

PREPARED FOR:
USL2 MR
MONTGOMERY VILLAGE
BUSINESS TRUST
c/o MONUMENT REALTY
1700 K STREET, NW, SUITE 600
WASHINGTON, DC 20006
202.777.2010
RUSSELL HINES

DESIGN CONSULTANTS

ARCHITECTS
TORTI GALLAS AND PARTNERS, INC
1300 SPRING STREET, SUITE 400
SILVER SPRING, MD 20910
301.588.4800
ERIK J. AULESTIA

ATTORNEY
LERCHE, EARLY & BREWER
CHTD.
3 BETHESDA METRO CENTER
SUITE 460
BETHESDA, MD 20814
301.841.3832
PATRICIA HARRIS


TRAFFIC ENGINEER
WELLS + ASSOCIATES
8730 GEORGIA AVENUE, SUITE 200
SILVER SPRING, MD 20910
301.448.1333
KEVIN BERGER

LANDSCAPE ARCHITECT
VIKA MARYLAND, LLC
SUITE 400
GERMANTOWN MD, 20874
301.916.4100
JOSH SLOAN

CIVIL ENGINEER
VIKA MARYLAND, LLC
20251 CENTURY BOULEVARD
SUITE 400
GERMANTOWN MD, 20874
301.916.4100
MIKE GOODMAN

REVISIONS	DATE
1ST SUBMISSION	05/05/17
DRC COMMENTS	08/09/17

PROFESSIONAL SEAL

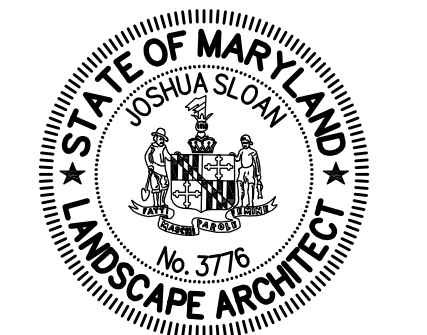

BLOOM MV
AREA I-VI
9TH ELECTION DISTRICT
MONTGOMERY COUNTY,
MARYLAND
WSSC GRID: 227NW09
TAX MAP: FJ342

820170130

FINAL FOREST CONSERVATION PLAN

NOTES

DRAWN BY: ___ NRP ___
DESIGNED BY: JCS
DATE ISSUED: AUGUST, 2017

VIKA PROJECT: VM1920

DRAWING NO: _____

SHEET NO: FFCP 410

PLANTING NARRATIVE FOR AFFORESTATION/REFORESTATION AREAS

THIS PLANTING NARRATIVE IS FOR THE PLANTING OF AFFORESTATION AND/OR REFORESTATION AREAS ONLY. FOR SPECIFICATIONS AND DETAILS FOR THE PLANTING OF LANDSCAPE TREES FOR FOREST CONSERVATION CREDIT (20 YEAR CANOPY LANDSCAPE CREDIT OR SPECIEM TREE MITIGATION CREDIT) SEE THE FINAL LANDSCAPE PLAN.

1. PRE-PLANTING CONSIDERATIONS

A. IN AREAS WITH SUBSTANTIAL GROWTH OF INVASIVE GROUND COVER SPECIES, MEASURES SHALL BE TAKEN TO REMOVE AND CONTROL INVASIVES. THE INFESTED AREAS SHOULD BE MOWN PRIOR TO COMMENCEMENT OF PLANTING. NECESSARY WEED CONTROL MEASURES SHOULD BE DETERMINED DURING THE PRE-PLANTING INSPECTION, INCLUDING BUT NOT LIMITED TO, MULCHING, PERIODIC MOWING AROUND THE REFORESTATION PLANTINGS, AND FABRIC COVERINGS. THE USE OF CHEMICAL WEED CONTROLS WILL BE LIMITED TO EXTREME CASES AND ONLY WITH PRIOR WRITTEN APPROVAL BY M-NCPPC STAFF. WHERE PERIODIC MOWING WILL OCCUR AS A WEED CONTROL MEASURE, THE TYPICAL TREE PLANTING DISTRIBUTION PATTERN SHOULD BE MODIFIED SO AS TO ALLOW ACCESS BY MOWING EQUIPMENT WITHOUT DAMAGE TO PLANTINGS.

B. A SOILS ANALYSIS WILL BE CONDUCTED PRIOR TO COMMENCEMENT OF REFORESTATION. ON LAND WHERE EXTENSIVE AGRICULTURAL USE HAS OCCURRED IN THE PAST, TEST PITS WILL BE DUG IN AREAS OF UNDISTURBED SOIL TO DETERMINE IF A FRAGIPAN LAYER IS PRESENT. IF FRAGIPAN IS PRESENT, IT SHOULD BE PERCED BY AUGERING AND PLANTING HOLES SHOULD BE DUG TO TWICE THE NORMAL DIAMETER FOR THE MATERIAL PLANTED.

C. SOILS SHOULD BE TREATED BY INCORPORATING NATURAL MULCH WITHIN THE TOP 12 INCHES, OR AMENDMENTS AS DETERMINED BY THE SOILS ANALYSIS. NATURAL AMENDMENTS, SUCH AS ORGANIC MULCH OR LEAF MOLD COMPOST ARE PREFERRED.

D. IF FILL MATERIAL IS USED AT THE PLANTING SITE, IT SHOULD BE CLEAN FILL WITH 12 INCHES OF NATIVE SOIL. STOCKPILING OF NATIVE TOP SOILS MUST BE DONE IN SUCH A WAY THAT THE HEIGHT OF THE PILE DOES NOT DAMAGE THE SEED BANK.

2. PLANT AMENDMENT MATERIAL STORAGE

IT IS RECOMMENDED THAT PLANTING OCCUR WITHIN 24 HOURS OF DELIVERY TO THE SITE. PLANT MATERIALS WHICH ARE LEFT UNPLANTED FOR MORE THAN 24 HOURS SHOULD BE PROTECTED FROM DIRECT SUN AND WEATHER AND KEPT MOIST. NURSERY STOCK SHOULD NOT BE LEFT UNPLANTED FOR MORE THAN TWO (2) WEEKS.

3. ON-SITE INSPECTION

PRIOR TO PLANTING, PLANTING STOCK SHOULD BE INSPECTED. PLANTS NOT CONFORMING TO STANDARD NURSERY/MAN SPECIFICATIONS FOR SIZE, FORM, VIGOR, ROOTS, TRUNK WOUNDS, INSECTS, AND DISEASE SHOULD BE REPLACED.

4. PLANTING SPECIFICATIONS

A. CONTAINER GROWN STOCK, SUCCESSFUL PLANTING OF CONTAINER GROWN STOCK REQUIRES CAREFUL SITE PREPARATION AND INSPECTION OF THE PLANT MATERIAL ROOT SYSTEM. CAUTION IS RECOMMENDED WHEN SELECTING PLANTS GROWN IN A SOILS MEDIUM DIFFERING FROM THAT OF THE PLANTING SITE. THE PLANT SHOULD BE REMOVED FROM THE CONTAINER AND THE ROOTS GENTLY LOOSENED FROM THE SOILS. IF THE ROOTS ENIRCLE THE ROOT BALL, SUBSTITUTION IS STRONGLY RECOMMENDED. J-SHAPED OR KINKED ROOT SYSTEMS SHOULD ALSO BE NOTED, AND SUBSTITUTED IF NECESSARY. ROOTS MAY NOT BE TRIMMED ON-SITE, DUE TO THE INCREASED CHANCES OF SOIL Borne DISEASES. THE PLANTING FIELD SHOULD BE PREPARED AS SPECIFIED. NATIVE STOCKPILED SOILS SHOULD BE USED TO BACKFILL PLANTING FIELD. RAKE SOILS EVENLY OVER THE PLANTING FIELD AND COVER WITH 2 TO 4 INCHES OF MULCH.

B. BALLED AND BURLAPPED TREES: BALLED AND BURLAPPED TREES MUST BE HANDLED WITH CARE WHILE PLANTING. TREES SHOULD NOT BE PICKED UP BY THE TRUNK OR DROPPED. AS BOTH PRACTICES WILL TEND TO SEPARATE THE TRUNK FROM THE ROOT BALL. PRIOR TO PLANTING, ROOT BALLS SHOULD BE KEPT MOIST.

C. PLANTING FIELDS SHOULD BE CREATED EQUAL TO 2.5 TIMES THE DIAMETER OF THE ROOT BALL. USE WATERING TO SETTLE SOIL BACKFILLED AROUND TREES. STOCKPILED NATIVE TOP SOILS, IF AVAILABLE, SHOULD BE USED TO BACKFILL THE PLANTING FIELD. AMENDMENTS ARE NOT RECOMMENDED IN THE PLANTING FIELD, AS STUDIES HAVE SHOWN THAT ROOTS WILL BE ENCOURAGED TO STAY WITHIN THE AMENDED SOILS. SOILS SHOULD BE RAKED EVENLY OVER THE PLANTING FIELD AND COVERED WITH 2 TO 4 INCHES OF MULCH.

D. STAKING OF TREES IS NOT RECOMMENDED EXCEPT IN AREAS OF HIGH WINDS. MOVEMENT IS NECESSARY TO STRENGTHEN THE TRUNK OF THE PLANTED TREE. IF STAKES ARE USED, THEY SHOULD BE REMOVED AFTER THE FIRST GROWING SEASON. WRAPPING IS ALSO NOT RECOMMENDED DUE TO THE INCREASED OPPORTUNITIES FOR INSECT INFESTATION AND DISEASE.

5. POST-PLANTING CONSIDERATIONS

A. SOIL STABILIZATION: FOR AREAS OF LARGE-SCALE DISTURBANCE, SOILS MUST BE STABILIZED USING A NON-TURF-BUILDING GROUND COVER OR ENGINEERING FABRIC.

B. PROTECTIVE DEVICES: TO PREVENT DAMAGE OF PLANTED AREAS, ALL REFORESTATION AND AFFORESTATION SITES MUST BE POSTED WITH APPROPRIATE SIGNS AND FENCED. CONSTRUCTION EQUIPMENT SHALL BE PROHIBITED IN THESE AREAS. SEE FINAL FOREST CONSERVATION NOTES 6, AND 7 THIS SHEET.

ADDITIONAL NOTES

1. SPOILS AND DEMOLITION, DEBRIS, EXCAVATION, ETC. SHALL NOT BE STOCKPILED WITHIN 50' OF THE TREE SAVE LINE.

2. PLANTINGS INSTALLED UNDER THIS PLAN SHALL BE MAINTAINED IN A HEALTHY CONDITION FOR A PERIOD OF TWO YEARS UNDER THE TERMS OF A MAINTENANCE & MANAGEMENT AGREEMENT WITH THE MONTGOMERY COUNTY PLANNING BOARD.

3. IN THE CATEGORY I FOREST CONSERVATION EASEMENT, EXISTING FENCES AND DEBRIS WILL BE REMOVED AND THE EASEMENT AREA RESTORED TO NATURAL CONDITIONS TO THE SATISFACTION OF THE M-NCPPC PLANNING DEPARTMENT.

FINAL FOREST CONSERVATION NOTES

SEQUENCE OF EVENTS FOR PROPERTIES REQUIRED TO COMPLY WITH FOREST CONSERVATION PLANS, EXEMPTIONS FROM SUBMITTING FOREST CONSERVATION PLANS, AND TREE SAVE PLANS (M-NCPPC M PLANNING DEPARTMENT MARCH, 2017)

THE PROPERTY OWNER IS RESPONSIBLE FOR ENSURING ALL TREE PROTECTION MEASURES ARE PERFORMED IN ACCORDANCE WITH THE APPROVED FINAL FOREST CONSERVATION PLAN OR TREE SAVE PLAN, AND AS MODIFIED IN THE FIELD BY A PLANNING DEPARTMENT FOREST CONSERVATION INSPECTOR. THESE MEASURES MUST MEET OR EXCEED THE MOST RECENT STANDARDS PUBLISHED BY THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI A300).

PRE-CONSTRUCTION

1. AN ON-SITE PRE-CONSTRUCTION MEETING IS REQUIRED AFTER THE LIMITS OF DISTURBANCE HAVE BEEN STAKED AND FLAGGED AND BEFORE ANY LAND DISTURBANCE.

2. THE PROPERTY OWNER MUST ARRANGE FOR THE MEETING AND THE FOLLOWING PEOPLE MUST PARTICIPATE AT THE PRE-CONSTRUCTION MEETING: THE PROPERTY OWNER OR THEIR REPRESENTATIVE, CONSTRUCTION SUPERINTENDENT, INTERNATIONAL SOCIETY OF ARBORICULTURE (ISA) CERTIFIED ARBORIST (MARYLAND LICENSED TREE EXPERT REPRESENTING OWNER THAT WILL IMPLEMENT THE TREE PROTECTION MEASURES, THE PLANNING DEPARTMENT FOREST CONSERVATION INSPECTOR, AND MONTGOMERY COUNTY DEPARTMENT OF PERMITTING CONTROL INSPECTOR. THE PURPOSE OF THIS MEETING IS TO VERIFY THE LIMITS OF DISTURBANCE AND DISCUSS SPECIFIC TREE PROTECTION AND TREE CARE MEASURES SHOWN ON THE APPROVED PLAN. NO LAND DISTURBANCE SHALL BEGIN BEFORE TREE PROTECTION AND STRESS-REDUCTION MEASURES HAVE BEEN IMPLEMENTED AND APPROVED BY THE PLANNING DEPARTMENT'S FOREST CONSERVATION INSPECTOR.

a. TYPICAL TREE PROTECTION DEVICES INCLUDE:

- i. CHAIN LINK FENCE (FOUR FEET HIGH)
- ii. SUPER SILT FENCE WITH WIRE STRUNG BETWEEN THE SUPPORT POLES (MINIMUM 4 FEET HIGH) WITH HIGH VISIBILITY FLAGGING.
- iii. 1/4 GAUGE, 2 INCH X 4 INCH WELDED WIRE FENCING SUPPORTED BY STEEL T-BAR POSTS (MINIMUM 4 FEET HIGH) WITH HIGH VISIBILITY FLAGGING.

b. TYPICAL STRESS REDUCTION MEASURES MAY INCLUDE, BUT ARE NOT LIMITED TO:

- i. ROOT PRUNING WITH A ROOT CUTTER OR VIBRATORY FLOW DESIGNED FOR THAT PURPOSE; TREACHERS ARE NOT ALLOWED, UNLESS APPROVED BY THE FOREST CONSERVATION INSPECTOR.
- ii. CROWN REDUCTION OR PRUNING
- iii. WATERING
- iv. FERTILIZING
- v. VERTICAL MULCHING
- vi. ROOT AERATION SYSTEMS

MEASURES NOT SPECIFIED ON THE FOREST CONSERVATION PLAN MAY BE REQUIRED AS DETERMINED BY THE FOREST CONSERVATION INSPECTOR IN COORDINATION WITH THE PROPERTY OWNER'S ARBORIST.

3. A MARYLAND LICENSED TREE EXPERT MUST PERFORM, OR DIRECTLY SUPERVISE, THE IMPLEMENTATION OF ALL STRESS REDUCTION MEASURES. DOCUMENTATION OF THE PROCESS (INCLUDING PHOTOGRAPHS) MAY BE REQUIRED BY THE FOREST CONSERVATION INSPECTOR, AND WILL BE DETERMINED AT THE PRE-CONSTRUCTION MEETING.

4. TEMPORARY TREE PROTECTION DEVICES MUST BE INSTALLED PER THE APPROVED FOREST CONSERVATION PLAN, EXEMPTION PLAN, OR TREE SAVE PLAN AND PRIOR TO ANY LAND DISTURBANCE. THE FOREST CONSERVATION INSPECTOR, IN COORDINATION WITH THE DPS SEDIMENT CONTROL INSPECTOR, MAY MARK FIELD ADJUSTMENTS TO INCREASE THE SURVIVABILITY OF TREES AND FOREST SHOWN AS SAVED ON THE APPROVED PLAN.

5. TREE PROTECTION FENCING MUST BE INSTALLED AND MAINTAINED BY THE PROPERTY OWNER FOR THE DURATION OF CONSTRUCTION PROJECT AND MUST NOT BE ALTERED WITHOUT PRIOR APPROVAL FROM THE FOREST CONSERVATION INSPECTOR. ALL CONSTRUCTION ACTIVITY WITHIN PROTECTED TREE AND FOREST AREAS IS PROHIBITED. THIS INCLUDES THE FOLLOWING ACTIVITIES:

- a. PARKING OR DRIVING OF EQUIPMENT, MACHINERY OR VEHICLES OF ANY TYPE.
- b. STORAGE OF ANY CONSTRUCTION MATERIALS, EQUIPMENT, STOCKPILING, FILL, DEBRIS, ETC.
- c. DUMPING OF ANY CHEMICALS (I.E., PAINT THINNERS), MORTAR OR CONCRETE REMAINDER, TRASH, GARBAGE, OR DEBRIS OF ANY KIND.
- d. FELLING OF TREES INTO A PROTECTED AREA.
- e. TRENCHING OR GRADING FOR UTILITIES, IRRIGATION, DRAINAGE, ETC.

6. FOREST AND TREE PROTECTION SIGNS MUST BE INSTALLED AS REQUIRED BY THE FOREST CONSERVATION INSPECTOR. THE SIGNS MUST BE WATERPROOF AND WORDING PROVIDED IN BOTH ENGLISH AND SPANISH.

DURING CONSTRUCTION

7. PERIODIC INSPECTIONS WILL BE MADE BY THE FOREST CONSERVATION INSPECTOR. CORRECTIONS AND REPAIRS TO TREE PROTECTION DEVICES MUST BE COMPLETED WITHIN THE TIMEFRAME GIVEN BY THE INSPECTOR.

8. THE PROPERTY OWNER MUST IMMEDIATELY NOTIFY THE FOREST CONSERVATION INSPECTOR OF ANY DAMAGE TO TREES, FORESTS, UNDERSTORY GROUND COVER, AND ANY OTHER UNDISTURBED AREAS SHOWN ON THE APPROVED PLAN. REMEDIAL ACTIONS, AND THE RELATIVE TIMEFRAMES TO RESTORE THESE AREAS, WILL BE DETERMINED BY THE FOREST CONSERVATION INSPECTOR.

POST-CONSTRUCTION

9. AFTER CONSTRUCTION IS COMPLETED, BUT BEFORE TREE PROTECTION DEVICES HAVE BEEN REMOVED, THE PROPERTY OWNER MUST REQUEST A FINAL INSPECTION WITH THE FOREST CONSERVATION INSPECTOR. AT THE FINAL INSPECTION, THE FOREST CONSERVATION INSPECTOR MAY REQUIRE ADDITIONAL CORRECTIVE MEASURES, WHICH MAY INCLUDE:

- a. REMOVAL AND POSSIBLE REPLACEMENT OF DEAD, DYING, OR HAZARDOUS TREES
- b. PRUNINGS OF DEAD OR DECLINING LIMBS
- c. SOIL AERATION
- d. FERTILIZATION
- e. WATERING
- f. WOUND REPAIR
- g. CLEAN UP OF RETENTION AREAS, INCLUDING TRASH REMOVAL.

10. AFTER THE FINAL INSPECTION AND COMPLETION OF ALL CORRECTIVE MEASURES THE FOREST CONSERVATION INSPECTOR WILL REQUEST ALL TEMPORARY TREE AND FOREST PROTECTION DEVICES BE REMOVED FROM THE SITE. REMOVAL OF THE PROTECTION DEVICES THAT ALSO OPERATE FOR EROSION AND SEDIMENT CONTROL, MUST BE COORDINATED WITH BOTH DPS AND THE FOREST CONSERVATION INSPECTOR AND CANNOT BE REMOVED WITHOUT PERMISSION OF THE FOREST CONSERVATION INSPECTOR. NO ADDITIONAL GRADING, SODDING, OR BURLAP MAY TAKE PLACE AFTER THE TREE PROTECTION FENCING IS REMOVED.

11. LONG-TERM PROTECTION MEASURES, INCLUDING PERMANENT SIGNAGE, MUST BE INSTALLED PER THE APPROVED PLAN. INSTALLATION WILL OCCUR AT THE APPROPRIATE TIME DURING THE CONSTRUCTION PROJECT. REFER TO THE APPROVED PLAN DRAWING FOR THE LONG-TERM PROTECTION MEASURES TO BE INSTALLED.

INSPECTIONS

(M-NCPPC PLANNING DEPARTMENT)

ALL FIELD INSPECTIONS MUST BE REQUESTED BY THE APPLICANT.

INSPECTIONS MUST BE CONDUCTED AS FOLLOWS:

TREE SAVE PLANS AND FOREST CONSERVATION PLANS WITHOUT PLANTING REQUIREMENTS

- 1. AFTER THE LIMITS OF DISTURBANCE HAVE BEEN STAKED AND FLAGGED, BUT BEFORE ANY CLEARING OR GRADING BEGINS
- 2. AFTER NECESSARY STRESS REDUCTION MEASURES HAVE BEEN COMPLETED AND PROTECTION MEASURES HAVE BEEN INSTALLED, BUT BEFORE ANY CLEARING AND GRADING BEGINS
- 3. AFTER COMPLETION OF ALL CONSTRUCTION ACTIVITIES, BUT BEFORE REMOVAL OF TREE PROTECTION FENCING, TO DETERMINE THE LEVEL OF COMPLIANCE WITH THE PROVISIONS OF THE FOREST CONSERVATION.

ADDITIONAL REQUIREMENTS FOR PLANS WITH PLANTING REQUIREMENTS

- 4. BEFORE THE START OF ANY REQUIRED REFORESTATION AND AFFORESTATION PLANTING.
- 5. AFTER THE REQUIRED REFORESTATION AND AFFORESTATION PLANTING HAS BEEN COMPLETED TO VERIFY THAT THE PLANTING IS ACCEPTABLE AND PRIOR TO THE START OF THE MAINTENANCE PERIOD.
- 6. AT THE END OF THE MAINTENANCE PERIOD TO DETERMINE THE LEVEL OF COMPLIANCE WITH THE PROVISIONS OF THE PLANTING PLAN AND, IF APPROPRIATE, RELEASE OF THE PERFORMANCE BOND.

"FOR LOCATION OF UTILITIES CALL 8-1-1 or 1-800-257-7777 OR LOG ON TO www.call811.com or http://www.mdsatellite.net 48 HOURS IN ADVANCE OF ANY WORK IN THIS VICINITY"

The excavator must notify all public utility companies with underground facilities in the area of proposed excavation and have those facilities located by the utility companies prior to commencing excavation. The excavator is responsible for compliance with requirements of Chapter 50A of the Montgomery County Code.

DEVELOPER'S CERTIFICATE	
THE UNDERSIGNED AGREES TO EXECUTE ALL THE FEATURES OF THE APPROVED FINAL FOREST CONSERVATION PLAN NO. 820170130 INCLUDING FINANCIAL BONDING, FOREST PLANTING, MAINTENANCE, AND ALL OTHER APPLICABLE AGREEMENTS.	
DEVELOPER'S NAME: USL2 MR MONTGOMERY VILLAGE BUSINESS TRUST	PRINTED COMPANY NAME
CONTACT PERSON OR OWNER: RUSSELL HINES	PRINTED NAME
ADDRESS: 1700 K STREET, NW, SUITE 600, WASHINGTON, DC 20006	
PHONE & E-MAIL: 202.777.2010 rhines@monumentrealty.com	
SIGNATURE: _____	DATE: _____